

### Subject of the modification


All PTX FM transmitter modules sold before May 30, 2009.

### Benefits of the modification

Flat PLL response on the lowest audio frequencies down to 4 Hz.

### Procedure of the modification

1. Turn off the unit and disconnect all cables.
2. Locate R18 resistor (10k) on the board, near the TSA5511 IC and RDS/SCA input connector.
3. Unsolder the R18 and place new resistor with a value of 3k3.  
OR  
Bypass the R18 with an additional resistor with a value of 4k7.

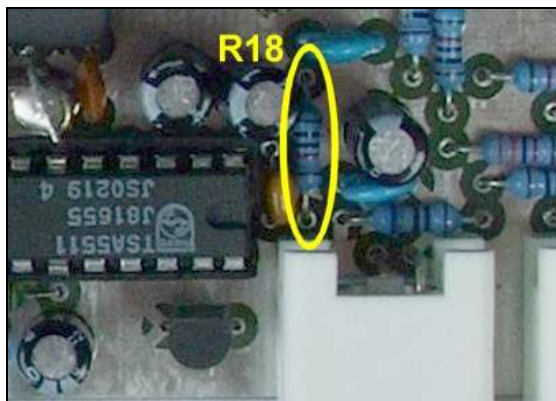

### Conclusion

Any support related to this modification is free.

mail@pira.cz    <http://pira.cz>